


Gap, Savile Row

Main Contractor: Space Workplace Ltd
Project Value: £800k
Specialist Mechanical Value: £120k



**SAVILE
ROW W1**
CITY OF WESTMINSTER

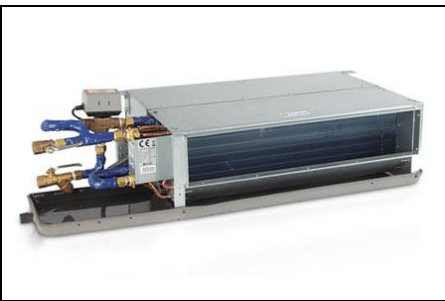

Working beneath the Main Contractor, we were employed to carry out the re-design & re-positioning of the existing 4 Pipe Fan Coil Systems to accommodate the Cat B design which extended to 15,000sqft of the 4th floor of this new building on Savile Row.

Amongst our pre-commencement works we employed a specialist water treatment company to carry out the pre-works water validation tests and verifications. The focus of our activity moved on to re-positioning the FCUs, re-configuring the ductwork & grille arrangements and installing additional cross-talk attenuation.

Upon completion, the specialist water treatment engineers returned to site to perform water quality tests & verification to enable the system to be run. Commissioning took place of the system flow rates, air flow & performance through the ductwork & grilles and final commissioning of the controls by the 3rd party BMS specialist.

